

# TonerKits

## do-it-yourself toner refill kits

Request a detailed color copy of these instructions by email at [support@tonerkits.com](mailto:support@tonerkits.com)

### Standard Refill Instructions

E330 sf2.0

Dell 3105399/5400/5401/5402, 3107020/7022/7023/7025  
Dell 3108706/8707/8708/8709  
Lexmark 12A8300/8305/8400/8405, 23800SW/20SW  
Lexmark 24015SA/35SA, 34015HA/35HA  
Lexmark E250A11A/21A, E352H11A/21A  
Lexmark X203A21/11G, X340A21G/11G, X340H21G/11G  
IBM 75P5708/5709/5710/5712  
IBM 39V1637/1638



1) Install the new chip the same way the old chip was installed in the location shown. CAUTION - All chips are static sensitive and can be damaged if subjected to a static discharge.

Note: If there is no screw holding the chip in place, then it is being held by adhesive and can be gently pried off.

2) Use a pair of needle nose pliers or small flat blade screwdriver to pull or pry out the fill hole plug.

3) Shake the toner bottle well to aerate and loosen the toner. Then remove the cap and install the pouring spout. Slowly pour in the new toner. The whole bottle should be used so the toner level matches the chip. Try to avoid squeezing the bottle as it may cause toner to blow out all over the cartridge. Once refilling is complete, reinstall the fill hole plug.

4) Gently shake the cartridge side to side to level the toner. Then reinstall it in the machine and run some test prints.

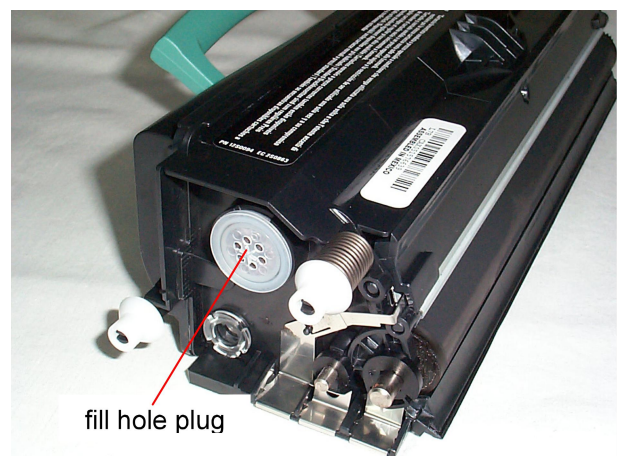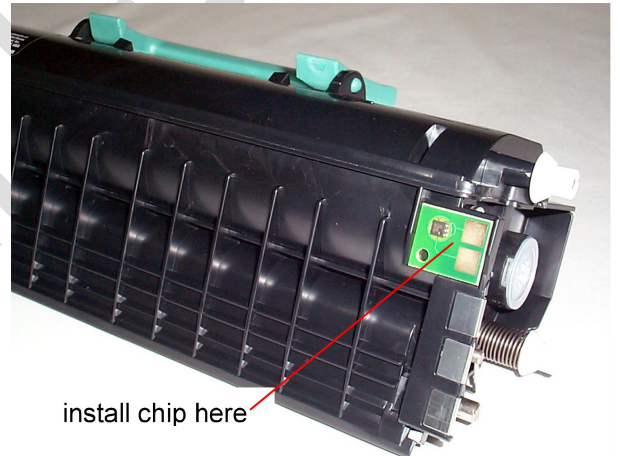

**Fast Online Ordering Available 24/7**  
[www.tonerkits.com](http://www.tonerkits.com)